




# Single & Dual-Axle Trailers

## Trailer-Mount Pressure Washers

*Customizable with Industrial Pressure Washers*

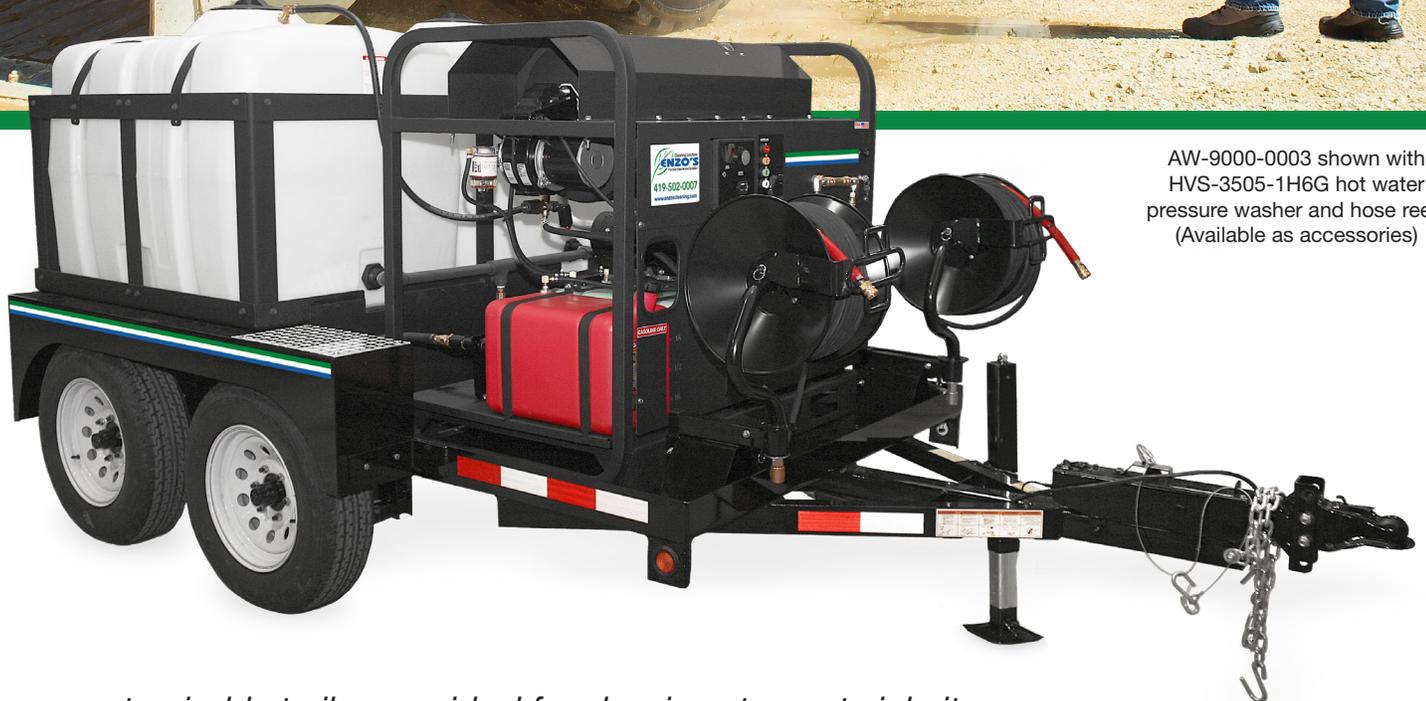

AW-9000-0003 shown with HVS-3505-1H6G hot water pressure washer and hose reels (Available as accessories)

*These customizable trailers are ideal for cleaning at remote jobsites. Pair with an industrial pressure washer, hose reels and accessories and you will have everything you need.*



# Single & Dual-Axle Trailers

## Trailer-Mount Pressure Washers


### FEATURES

- Jack with pad
- 2-inch ball hitch
- Rubber mounted sealed lights
- Tanks are enclosed in a powder coated steel frame
- Will fit all belt-driven pressure washers
- 3/16-inch solid steel trailer deck plate
- Aluminum treadplate steps for access to water tank
- Storage area located under the water tanks (AW-9000-0003 and AW-9000-0004 trailers)
- (2) 200-gallon water tanks plumbed together (AW-9000-0003 and AW-9000-0004 trailers)

### ACCESSORIES AND OPTIONS

- Pressure washers\*
- Hose reels
- Backflow preventers
- Trailer tank bypass
- Trailer hitches

\*Pressure washers sold separately.

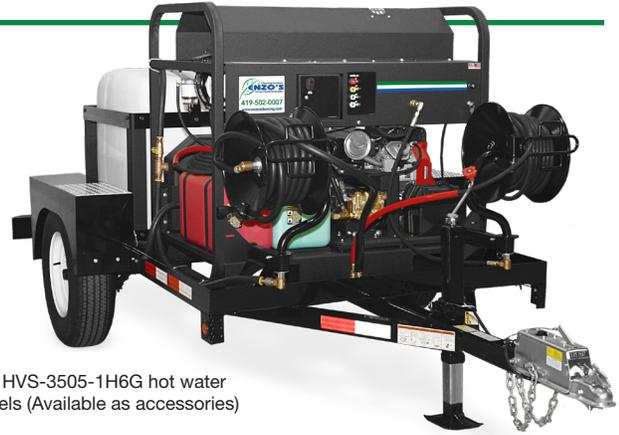

AW-9000-0006 shown with HVS-3505-1H6G hot water pressure washer and hose reels (Available as accessories)

### SINGLE-AXLE TRAILERS

MODEL NUMBER	WATER TANK	BRAKES	HITCH	TIRES	AXLE	ANGLE FRAME	DIMENSIONS (LxWxH)	GROSS VEHICLE WT.
AW-9000-0005	(1) 200-gallon	Surge	2in., ball	(2) ST205-75R 15in. radial	(1) 3,500 lb.	3x4.25in.	13.2x6.8x5.6ft.	3,500 lb.
AW-9000-0006	(1) 200-gallon	Electric	2in., ball	(2) ST205-75R 15in. radial	(1) 3,500 lb.	3x4.25in.	13.2x6.8x5.6ft.	3,500 lb.
AW-9000-0007	(1) 200-gallon	None	2in., ball	(2) ST205-75R 15in. radial	(1) 3,500 lb.	3x4.25in.	13.2x6.8x5.6ft.	3,500 lb.

### DUAL-AXLE TRAILERS

MODEL NUMBER	WATER TANK	BRAKES	HITCH	TIRES	AXLE	STORAGE AREA	ANGLE FRAME	DIMENSIONS (LxWxH)	GROSS VEHICLE WT.
AW-9000-0003	(2) 200-gallon	Surge	2in., ball	(4) ST205-75R 15in.	(2) 3,500 lb.	5ft.x4ft.x12in.	3x4.25in.	13.2x6.8x5.6ft.	7,000 lb.
AW-9000-0004	(2) 200-gallon	Electric	2in., ball	(4) ST205-75R 15in.	(2) 3,500 lb.	5ft.x4ft.x12in.	3x4.25in.	13.2x6.8x5.6ft.	7,000 lb.
AW-9000-0008	(1) 200-gallon	Surge	2in., ball	(4) ST205-75R 15in.	(2) 3,500 lb.	None	3x4.25in.	13.2x6.8x5.6ft.	7,000 lb.

### ACCESSORIES & OPTIONS:

#### HIGH PRESSURE HOSE REELS

These high pressure hose reels include a jumper hose and mounting bracket.

**TX-0001** (13-inch reel)

**TX-0002** (16-inch reel)

#### LOW PRESSURE HOSE REELS

These low pressure hose reels include a mounting bracket and plumbing.

**TX-0003** (16-inch reel for use with AW-9000-0003 and AW-9000-0004 trailers)

**TX-0013** (16-inch reel for use with AW-9000-0005, AW-9000-0006, AW-9000-0007 and AW-9000-0008 trailers)

#### REPLACEMENT HOSE REEL PARTS

When adding hose reels to single or dual-axle trailers, use the following jumper hose and mounting bracket.

**15-0159** (40-inch x 3/8-inch jumper hose, black, 4500-PSI)

**13-0179A01** (Mounting bracket)

**50-0195** (13-inch hose reel, 150-foot maximum hose length, rated for units up to 4000-PSI)

**50-0196** (16-inch hose reel, 200-foot maximum hose length, rated for units up to 4000-PSI)

#### BACKFLOW PREVENTERS

A backflow preventer is required on trailer units in California.

**TX-0011**

- Adds a backflow preventer to trailers that have the TX-0003 or TX-0013 low pressure hose reel option
- Mounts to hose reel

**TX-0012**

- Adds a backflow preventer to AW-9000-0005, AW-9000-0006, AW-9000-0007 and AW-9000-0008 trailers that do not have the TX-0013 low pressure hose reel option
- Mounts to inlet plumbing on trailer

#### TRAILER TANK BYPASS

**TX-0005** (For AW-9000-0003 and AW-9000-0004 trailers with a HVS or HDC Series pressure washer)

**TX-0007** (For AW-9000-0005, AW-9000-0006, AW-9000-0007 and AW-9000-0008 trailers with a HVS or HDS Series pressure washer)

- Removes the float system, while adding the necessary plumbing
- Water bypasses back to water tank

#### DELUXE TRAILER OPTIONS

**TX-0014** (For AW-9000-0003 and AW-9000-0004 trailers with a HVS or HDC Series pressure washer)

**TX-0016** (For AW-9000-0005, AW-9000-0006, AW-9000-0007 and AW-9000-0008 trailers with a HVS or HDC Series pressure washer)

- Adds a ball valve, trailer tank bypass and low pressure hose reel

#### TRAILER HITCHES

Replaces the standard 2-inch ball hitch with an adjustable trailer coupler hitch or lunette ring hitch. Includes hitch with brackets and hardware.

**TX-0009** (Adjustable trailer coupler hitch for AW-9000-0004, AW-9000-0006 and AW-9000-0007 trailers)

**TX-0010** (Adjustable trailer coupler hitch for AW-9000-0003, AW-9000-0005 and AW-9000-0008 trailers)

- Heavy-duty, 2-inch trailer hitch with pin-style fastener trailer coupler and hinged ball socket with visual indication of proper closure around the ball - all to ensure a quick, easy and secure hook-up

**TX-0018** (Lunette ring hitch for AW-9000-0006 and AW-9000-0007 trailers)

**TX-0019** (Lunette ring hitch for AW-9000-0003, AW-9000-0004 and AW-9000-0008 trailers)

- 3-inch integrated lunette ring for use with pintle hitches



**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).